


bond Bridge **PRO**

for Pro Installers!

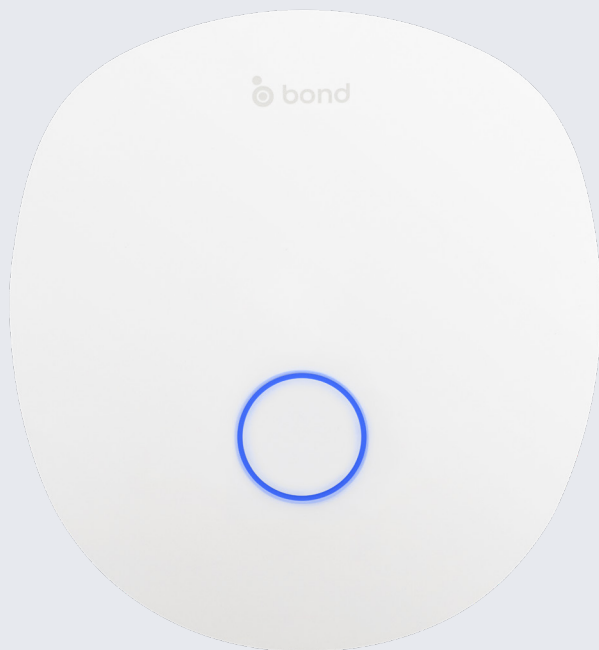

model number: BD-1750

The Quick Read

- ✓ Bond Bridge Pro (BD-1750) is a Sub GHz to Wifi (TCP/IP) Bridge
- ✓ Cover remote controls between 300MHz - 450MHz*
- ✓ Somfy, all ceiling fans, and fireplaces
- ✓ 2.4GHz Wi-Fi, Ethernet + POE
- ✓ Extended warranty
- ✓ Drivers for C4, Elan, RTI, URC and more
- ✓ Live tech support

The Whole Story

The Pro Installer market has spoken, and we listened: Bond Bridge Pro, our new low-frequency RF to Wi-Fi/Ethernet bridge, offers a fresh look and enhanced functionality.

Designed for Pro Installers seeking to elevate the Smart Bridge experience, Bond Bridge Pro is an easier, faster, and more powerful way to connect RF controlled devices in a smart home automation portfolio.

Quick and easy setup eliminates workarounds and complex drivers for ceiling fans, fireplaces, and shades.

Mount Bond Bridge Pro centrally for full coverage and control of RF devices throughout the home. PoE and Ethernet enable fully hard-wired integration.

Our open API facilitates integrations with all home automation systems.

Supported Devices



Ceiling fans



Motorized shades



Fireplaces

"Bond", and "Bond Bridge Pro" are trademarks of Olibra, LLC. All other brand names are trademarks of their respective owners.

Bond Bridge vs. Bond Bridge Pro		
	 Bond Bridge	 Bond Bridge Pro
Range	2,500 sq ft	3,500 sq ft
Can control up to	30 devices	50 devices
Warranty	1 year	3 years
Ethernet connectivity	✗	✓
Power Over Ethernet - PoE	✗	✓
Ceiling and Wall mount	✗	✓
Works with Sidekick	✗	✓
RF	✓	✓
IR	✓	✗
Open Local API	✓	✓
In-App Live Customer Support	✓	✓


Works With

- Control 4
- Nice Home
- RTI
- URC
- Savant
- Crestron
- Hubitat
- Hey Google
- Amazon Alexa
- SmartThings
- Somfy
- Rollease Acmeda
- Nice
- Basalte



And many more! Check out the ever growing list of brands that Bond Bridge Pro work with


Dimensions & Weight

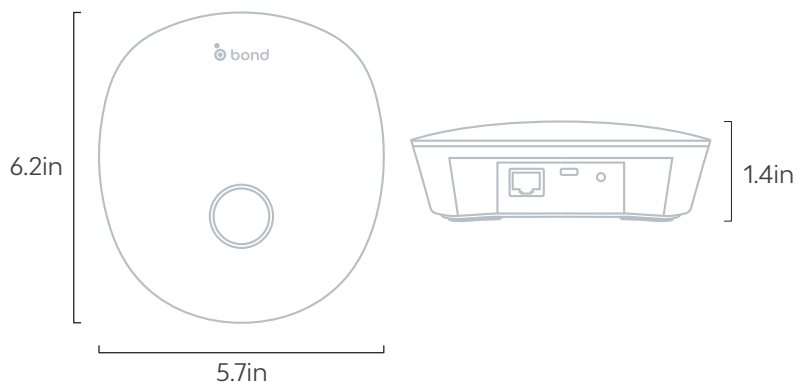

Total: 1.4" H x 5.7" W x 6.2" D **Weight:** 7.2 oz

Easy and quick setup

Setting up devices on the Bond Home app takes only 30 sec per device

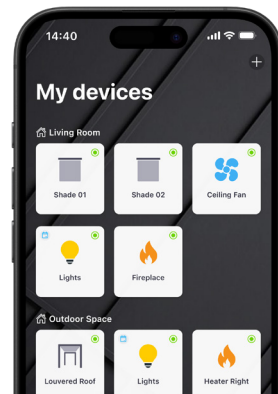

RF Frequency 300—450 MHz* **Power** 3VDC/1W or PoE **RF Reach** 3,500 sq ft
Connectivity 2.4 GHz Wi-Fi or Ethernet **Cable Length** 6 ft

* Frequency range for the North America region is restricted, with bands 321.5—336.0 MHz & 399.5—410.5 MHz unavailable. In Australia only bands 433.05—434.79 MHz are supported. In EU, supported bands 433.05—434.79 MHz, Maximum Power: -1.7 dBm, Connectivity: 2.4 GHz Wi-Fi 2412—2472 MHz